



CHITWOOD MULTI-PURPOSE OVEN

TITAN CHITWOOD MULTI-PURPOSE OVEN



MDL-250 shown with optional stainless steel sides and casters



MDL-100 shown with optional casters

MODEL NO.	DESCRIPTION
<input type="checkbox"/> MDL-50	SINGLE OVEN
<input type="checkbox"/> MDL-250	DOUBLE DECK SINGLE OVEN
<input type="checkbox"/> MDL-100	DUAL OVEN
<input type="checkbox"/> MDL-2100	DOUBLE DECK DUAL OVEN

STANDARD FEATURES

- 14 gauge stainless steel all welded body construction
- Stainless steel front, sides and top
- 10 gauge stainless steel door hinges
- Durable stainless steel mesh door gasket
- Magnetic "SURE-LATCH" door catches
- Lift-out rack guides for easy cleaning
- Four chrome plated oven racks (wires curled and welded around main frame with no sharp ends)
- Lift-out flue baffle
- Oven control located in cool zone
- Separate control for smoke ejector system
- One piece slide out burner box assembly for easy front servicing
- Heavy gauge slide out smoke drawer holds several wood chunks
- Stainless steel drip pan
- Stainless steel gas tubing throughout
- Stainless steel adjustable 6" legs
- 3/4" gas regulator

AVAILABLE OPTIONS

- Door hinged. Left Right
- Stainless steel stand with shelf and chrome rack guides
- Single manifold connection (double deck model)

ACCESSORIES

- 6" casters, front two locking (5" diameter wheel)
- 36" flex hose with quick disconnect (3/4" connection)
- 48" flex hose with quick disconnect (3/4" connection)




WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA





CHITWOOD MULTI-PURPOSE OVEN

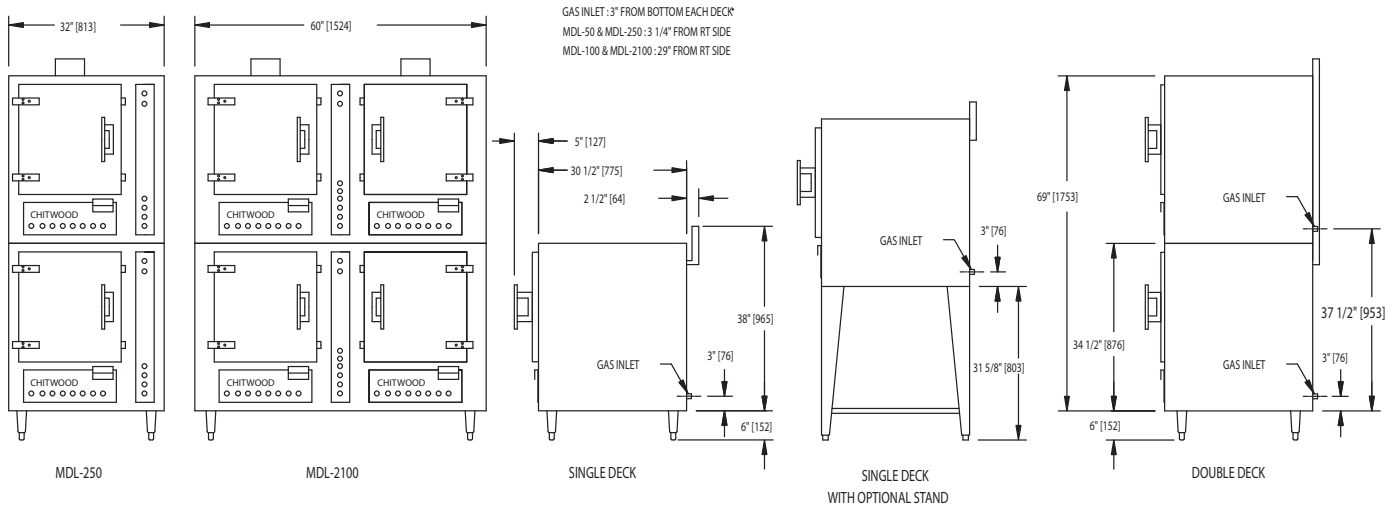

MODEL	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.
MDL-50	30,000	32"	38"	SEE DRAWING	300 LBS.
MDL-250	60,000	32"	38"	SEE DRAWING	610 LBS.
MDL-100	60,000	60"	38"	SEE DRAWING	600 LBS.
MDL-2100	120,000	60"	38"	SEE DRAWING	1230 LBS.

DESCRIPTION:

CHITWOOD MULTI-PURPOSE OVEN. To be model #MDL _____ manufactured by Jade Range. Furnished with 14 gauge all welded steel construction with stainless steel front. Stainless steel front, sides and top. Back and bottom to be finished with heat resistant black paint. Oven rack guides and flue baffle to be removable without tools. Provide four oven racks per oven. Thermostat to adjust from 150° to 450° F. To have one 30,000 BTU/hr. burner. Each oven to have individual smoke ejector system. Provide pilot safety for each oven with stainless steel tubing throughout. Unit to be provided with 3/4" regulator and 6" stainless steel adjustable legs.

SPECIFY TYPE OF GAS WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

NOTE: SPECIFY TYPE OF GAS WHEN ORDERING.

UTILITY INFORMATION:

- Ranges are supplied with 1-1/4" front manifold connection and a 1" or 3/4" capped rear manifold connection. For rear manifold connection, remove cap. Ranges are supplied with 3/4" gas pressure regulator. For 1-1/4" or 1" gas pressure regulator, see accessories. (Specify required front manifold cap and cover when ordering.)

- Required operating pressure:
 Natural Gas 5" W.C. minimum
 Propane Gas 10" W.C. minimum
 14" W.C. maximum

Note: This unit must be connected with the gas appliance regulator supplied.