




TEPPAN-YAKI GRIDDLE



JTYG-2436

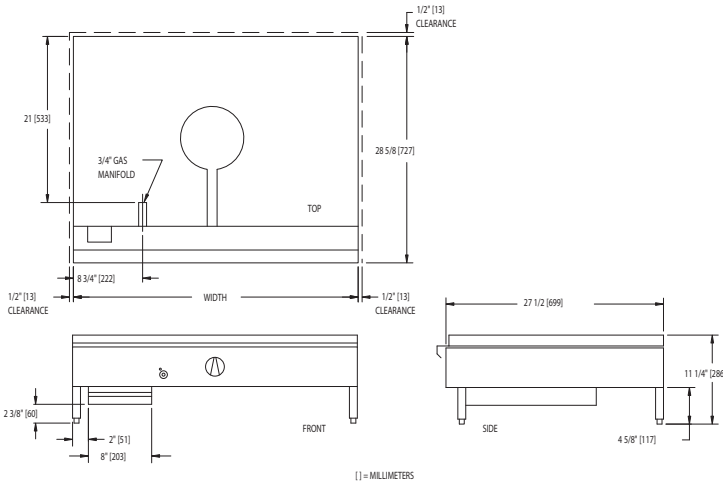

MODEL	BURNERS	WIDTH	PLATE DEPTH	O.A. DEPTH	BTUS
JTYG-2424	1	24"	24"	28-5/8"	30,000
JTYG-2436	1	36"	24"	28-5/8"	30,000
JTYG-2448	1	48"	24"	28-5/8"	30,000

Note: Griddle must NOT be sealed to counter, allow airspace as provided.

MODEL NO.	DESCRIPTION
<input type="checkbox"/> JTYG-2424	24" TEPPAN-YAKI GRIDDLE
<input type="checkbox"/> JTYG-2436	36" TEPPAN-YAKI GRIDDLE
<input type="checkbox"/> JTYG-2448	48" TEPPAN-YAKI GRIDDLE
<input type="checkbox"/> JTYG-_____	CUSTOM*

*Custom configurations available; consult factory for specifications and model #

STANDARD FEATURES

- 14 gauge stainless steel all welded body construction
- 14 gauge stainless steel front and sides
- Polished 3/4" thick steel griddle plate
- 14 gauge large capacity grease tray
- Single round 30,000 BTU/hr.
- Infinite control manual gas valve
- Stainless steel gas tubing throughout
- Automatic pilot safety valve
- Adjustable feet
- 3/4" gas regulator

AVAILABLE OPTIONS

- Stainless steel 8" extended plate shelf
- Stainless steel open stand with shelf and adjustable feet - model ST- (Equipment Stand)

ACCESSORIES

- 6" casters, front two locking (3" diameter wheel) for stand
- 36" flex hose with quick disconnect and restraining device
- 48" flex hose with quick disconnect and restraining device

NOTE: SPECIFY TYPE OF GAS WHEN ORDERING.

UTILITY INFORMATION:

- 3/4" connection (see drawing for location)

- Required operating pressure:
 Natural Gas 5" W.C. minimum
 Propane Gas 10" W.C. minimum
 14" W.C. maximum

Note: This unit must be connected with the gas appliance regulator supplied.

SPECIFY TYPE OF GAS WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

