



INFRARED BROILER

TITAN INFRARED BROILER



JMHB-36 shown with JRLH-02R-T-36

MODEL NO.	DESCRIPTION
<input type="checkbox"/> JSHBI-36H-36	INFRARED BROILER W/ STANDARD OVEN & WARMING OVEN
<input type="checkbox"/> JSHBI-36H-36C	INFRARED BROILER W/ CONVECTION OVEN & WARMING OVEN
<input type="checkbox"/> JSHBI-36H	INFRARED BROILER W/ CABINET BASE & WARMING OVEN
<input type="checkbox"/> JMHBI-36	MODULAR INFRARED BROILER

STANDARD FEATURES

- Four 26,000 BTU/hr. infrared burners
- Variable size multi-point gas connection—see utility information for details
- Large 2-piece lift out broiler grid (measuring 24-1/4" x 13-1/4" each)
- Grid carriage glides on roller bearing
- Counter balance mechanism
- Stainless steel front and sides
- 14 gauge all welded body construction
- Stainless steel removable oven interior
- Two chrome plated oven racks (wires curled and welded around main frame with no sharp ends) when ordered with oven
- Oven control located in cool zone
- Stainless steel 6" plate shelf
- Stainless steel gas tubing throughout
- Stainless steel adjustable 6" legs
- Stainless steel tray bed

DESCRIPTION:

Heavy duty infrared gas broiler. To be model #JSHBI _____ manufactured by Jade Range. Provide with four 26,000 BTU/hr. infrared burners. To have large 24-1/4" x 27-1/4" lift out broiler grid. Furnish carriage complete with rolling bearings and multi-action handle. To have 14 gauge all welded body with stainless steel front and sides. Stainless steel 6" plate shelf. To have 6" stainless steel adjustable legs.

SPECIFY BASE

STANDARD OVEN

To have conventional oven base with stainless steel lining. Oven sides and bottom to be removable without tools. Provide with two oven racks. Thermostat to adjust from 150°F to 550°F with 35,000 BTU burner. Oven interior 28-1/4" W x 14" H x 27-3/4" D.

CONVECTION OVEN

To have convection base with 14 gauge stainless steel interior. Provide with two oven racks. Thermostat to adjust from 150°F to 550°F with 30,000 BTU burner. Provide with 1/3 HP 115/60/1 blower motor. Oven interior 28" W x 13-3/4" H x 24-1/2" D.

CABINET BASE

To have stainless steel cabinet interior and exterior. Optional stainless steel doors.

SPECIFY TYPE OF GAS WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 FT.

AVAILABLE OPTIONS

- Cap and cover manifold. Left Right
- Stainless steel doors (cabinet base models)

ACCESSORIES

- 6" casters, front two locking (5" diameter wheel)
- 36" flex hose with quick disconnect (3/4" connection)
- 48" flex hose with quick disconnect (3/4" connection)
- 1" gas pressure regulator (specify gas type)
- 1-1/4" gas pressure regulator (specify gas type)
- Additional oven rack (two supplied with range)



WWW.JADERANGE.COM


JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
 Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA

FORM #JTO539 ©2008 JADE RANGE, LLC





INFRARED BROILER

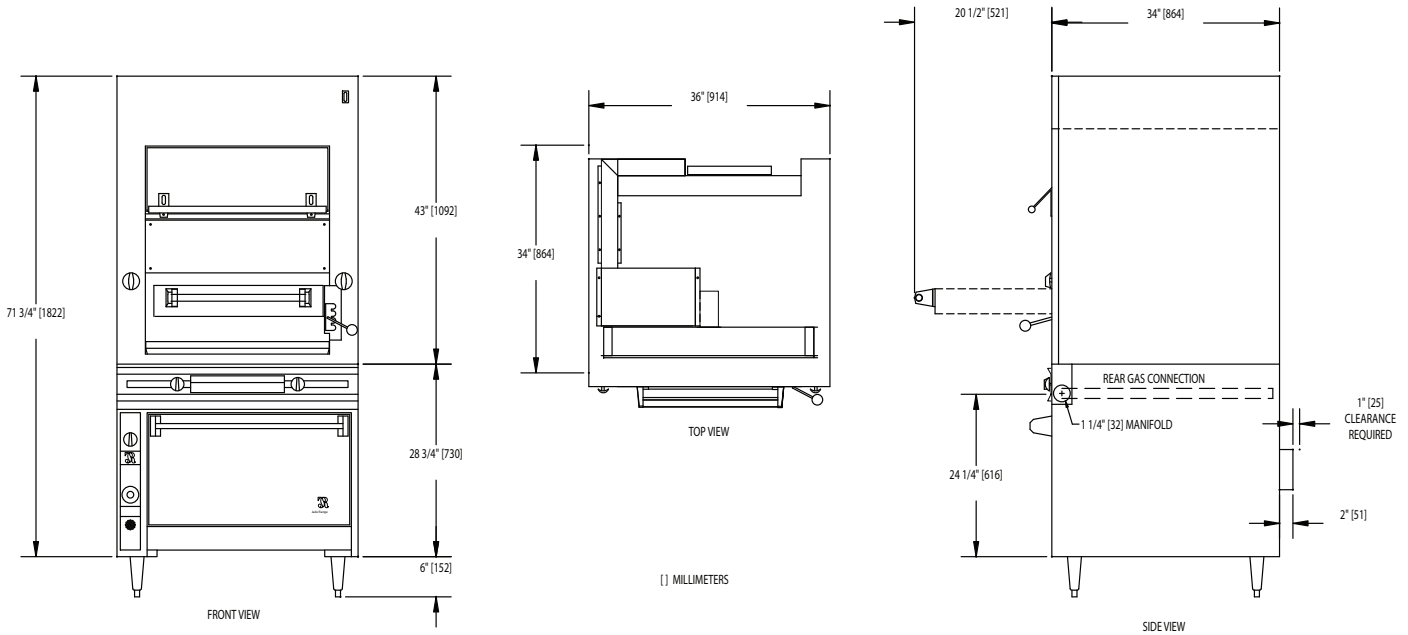

MODEL	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.
JSHBI-36H-36	139,000	36"	36-1/4"	SEE DRAWING	1000 LBS.
JSHBI-36H-36C	134,000	36"	36-1/4"	SEE DRAWING	1050 LBS.
JSHBI-36H	104,000	36"	36-1/4"	SEE DRAWING	800 LBS.
JMHBI-36	104,000	36"	36-1/4"	SEE DRAWING	500 LBS.

ELECTRIC CONVECTION OVEN ONLY:

- Power Supply: 115/60/1 - 6 foot cord with 3 prong plug
- Total maximum amps 4.0/oven
- 1.0 amp required for broiler blower
- Electronic Spark Ignitor: activated by power switch, ignites standing pilot
- Fan Switch: three positions, on for normal operation, on for quick cool down, off.

SPECIFY TYPE OF GAS WHEN ORDERING.

UTILITY INFORMATION:

- Ranges are supplied with 1-1/4" front manifold connection and a 1" or 3/4" capped rear manifold connection. For rear manifold connection, remove cap. Ranges are supplied with 3/4" gas pressure regulator. For 1-1/4" or 1" gas pressure regulator, see accessories. (Specify required front manifold cap and cover when ordering.)
- Required operating pressure:
 - Natural Gas 5" W.C. minimum
 - Propane Gas 10" W.C. minimum
 - 14" W.C. maximum

Note: This unit must be connected with the gas appliance regulator supplied.