

## Model X-33

### Low Temp Undercounter Dishwasher

X-33 cleans your dishes, glassware, silverware and utensils. This model is excellent for small restaurants, fast food operations, institutions, nursing homes, etc.



#### HIGHLIGHT FEATURES

- Fully automatic washing and rinsing operation with integrated chemical injection system
- Wash tank heater to ensure and maintain proper temperature
- Sanitary labyrinth door eliminates any gasket
- Deep drawn one piece unified inner chamber
- Rinse-additive pump for sparkling results
- Detergent pump for consistent results
- Just the push of one button fills the wash tank
- No need for any booster heater
- New and improved wash arm design
- Highest quality fabrication using the most advanced machinery will ensure long-life and increased durability
- Slide out control panel for ease of service & maintenance
- Automatic drain valve mechanism assists to drain water up to a height of 36"
- Stainless steel wash and rinse arms
- Inner wash tank stamped in AISI 316 - resists corrosion

#### STANDARD FEATURES

- Double-wall insulation on top and side panels.
- Body, external housing and all chassis components in brushed stainless steel AISI 304
- .75 HP drip-proof pump motor
- Door safety switch
- Adjustable peristaltic pumps for detergent, rinse and sanitizer
- Cycle counter
- Reliable mechanical-type cam timer
- Detergent/chemical connections
- Automatic Fill

#### TECHNICAL FEATURES

- Racks per hour: 37
- Water consumption per cycle (Gal.): 1.00 US Gallon
- Wash Motor: 0.75 HP
- Temperature: 140 F°
- Wash Time: 45 seconds
- Dwell Time: 12 seconds
- Rinse Time: 28 seconds
- Total cycle time: 85 seconds

# Model X-33



**Control Panel**

Slide out control panel providing quick access to all essential electrical components



**3 Peristaltic Pumps**

The X-33 comes equipped with all 3 peristaltic pumps as well as prime switch



**Band Heater**


Maintains wash water at the proper temperature



**Inner Wash Tank**

Stainless steel wash and rinse arms are interchangeable and easily removed for cleaning.

## Dimensions:

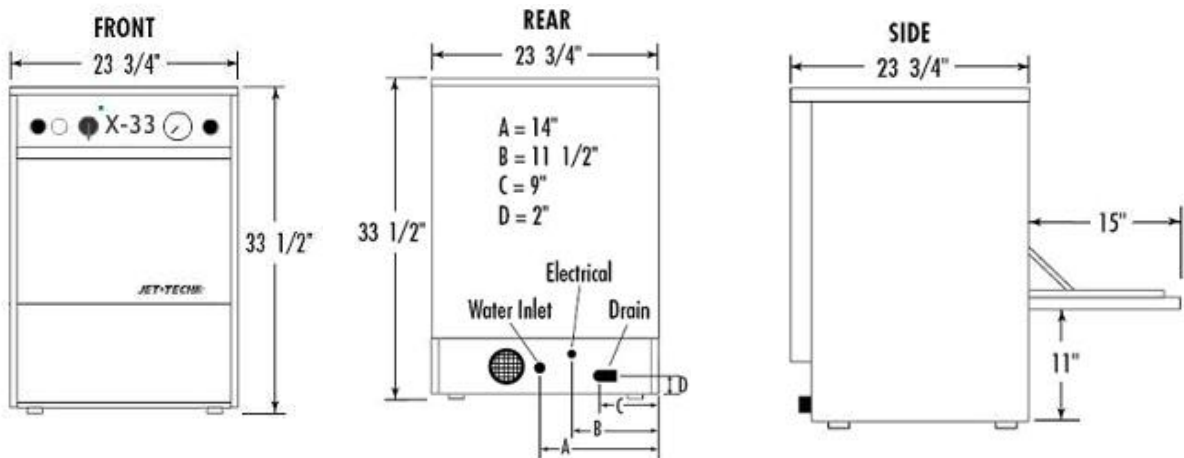

## UTILITIES

Electrical: Machine connection / Machine Load Amps - 115 Volts/60, 13 Amps

Hot Water: 1/2" NPT 140 F Hot Water Connection / Flow Pressure: 25 PSI

Drain: 1" I.P.S.



MVP GROUP CORP.  
 TEL: (514) 737-9701 FAX: (514) 342-3854  
 TOLL FREE: (888) 275-4538 TOLL FREE FAX: (877) 453-8832  
 mvpgroupcorp.com sales@mvpgroupcorp.com