



T30 LSP



T50 LSP



T80 LSP

Top Mount Storage Cabinets

Kelvinator Top Mount Storage Cabinets are unsurpassed in convenience, performance and reliability.

Cabinets are available in one-, two-, and three-door models to fit most common applications. Cantilever shelves are epoxy coated for durability and can easily be adjusted. Hinges are self-closing or can be set to hold door open while loading.

Top mount condensing unit means unobstructed air flow and easier servicing. Extra large face area on condenser provides more efficient energy consumption and reduces cleaning and maintenance.



FEATURES:

- Microprocessor digital temperature and programmable defrost controller with LED digital display
- CRO and TXV valves
- Heated perimeter and mullions
- Solid painted foam-filled doors
- Self-contained top-mount compressor
- Auto door switch technology

- Energy Star compliant
- Refrigerant R-404a
- Temperature range +10°F to -15°F

OPTIONS:

- Caster kit
- Additional cantilever shelves

formerly
Kelvinator 

Project:

Quantity:

Item#:

Model Specified:

Approval: _____



Top-Mount Low-Temp Storage Cabinets

TECHNICAL DATA



MODEL	T30LSP	T50LSP	T80LSP
Temp Range	0°F to -20°F	0°F to -20°F	0°F to -20°F
Exterior Dimensions			
Length	31"	52"	78"
Depth	36.88"	36.88"	36.88"
Height	83.75"	83.75"	83.75"
Interior Dimensions			
Length	26 $\frac{1}{4}$ "	47 $\frac{1}{4}$ "	73 $\frac{1}{4}$ "
Depth	29 $\frac{5}{8}$ "	29 $\frac{5}{8}$ "	29 $\frac{5}{8}$ "
Height	60 $\frac{5}{8}$ "	60 $\frac{5}{8}$ "	60 $\frac{5}{8}$ "
Number of Doors	1	2	3
Door Construction	Foam-in-place urethane	Foam-in-place urethane	Foam-in-place urethane
Hinge Type	Spring-loaded, cam	Spring-loaded, cam	Spring-loaded, cam
Number of Shelves	4+1 bottom rack	8+1 bottom rack	12+1 bottom rack
Shelf Type	Cantilever, Epoxy Coated Steel Wire	Cantilever, Epoxy Coated Steel Wire	Cantilever, Epoxy Coated Steel Wire
Insulation	Foam-in-place urethane	Foam-in-place urethane	Foam-in-place urethane
Wall Thickness	2 $\frac{3}{8}$ "	2 $\frac{3}{8}$ "	2 $\frac{3}{8}$ "
Capacity (cu. ft.)	27.3	49.1	76.2
Capacity (½-gal. pkg.)	161	324	486
Shipping Weight	465 lbs.	755 lbs.	900 lbs.
Amp Draw	10.5	11.0	11.0
Electrical	115/60/1	208-230/115V	208-230/115V
Interior Finish	High-quality Powder-coat Finish on Galvanized Steel		
Electrical Information	NEMA 5-15P	NEMA 20P	NEMA 20P

SPECIFICATIONS


Electrical Connections




SIDE VIEW

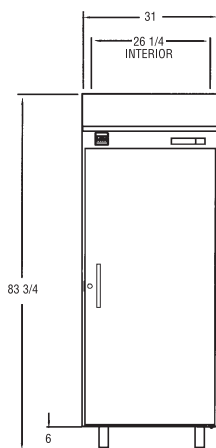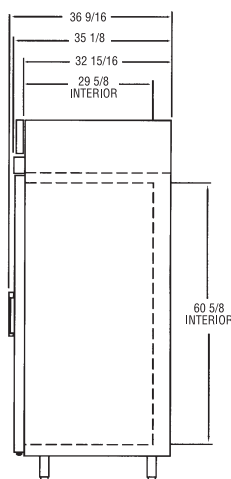

T30 LSP

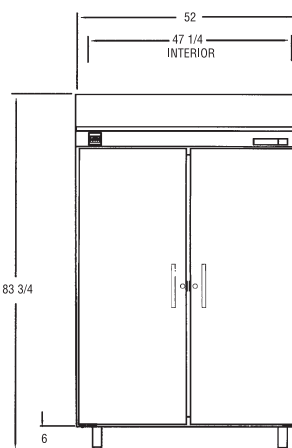

T50 LSP

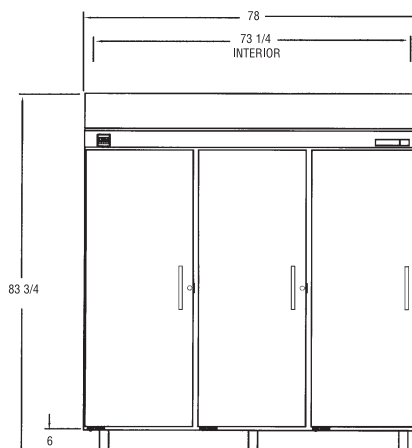

T80 LSP



Global Refrigeration, Inc., reserves the right to change specifications, terms, and prices without notice.