

VERY VERSATILE

EXTREMELY EFFICIENT

- Front breathing for flush installation
- Maintains NSF7 required temperatures
- Removable, reversible 10" cutting board



Model SKP7218



Model SKP6016



Model SKP488



Model SKP4812



Model SKP278


SILVER KING[®]
WE'VE GOT REFRIGERATION DOWN COLD™

FRONT BREATHING PREP TABLE SPECIFICATIONS

MODELS

SKP278,
SKP488,
SKP4812,
SKP6016,
SKP7218


EXTERIOR	Stainless steel, galvanized back.
INTERIOR	Stainless steel floor. Aluminum sidewalls. Coved corners and finished edges for easy cleaning.
INSULATION	Environmentally friendly foamed-in-place polyurethane insulation for maximum strength and durability.
DOORS	Polyurethane insulation, heavy-duty extruded aluminum frame, stainless steel exterior door panel and extra heavy-duty magnetic "Thermo Rubber" door gaskets combine to make the toughest, longest lasting door in the industry.
SHELVES	Heavy gauge wire shelves are hand dipped, not sprayed, providing double thick epoxy coating for superior durability and smooth finish. Adjustable in 1/2" increments on stainless steel pilasters.
CASTERS	Supplied with heavy-duty casters, (two with locks) threaded to Rivnuts, secured to a 12 gauge steel base to ensure years of trouble free operation.
REFRIGERATION	CFC-free refrigerant. Hermetically sealed, high efficiency, self contained refrigeration system features automatic defrost and forced air circulation. Adjustable temperature control and built-in temperature indicator standard. Automatic condensate evaporator means no plumbing or floor drains. Front breathing and venting allows for flush installation on all sides.
ELECTRICAL	Standard as 115 volt, 60Hz, single phase operation. 8 foot, 3-wire power cord with NEMA 5-15 plug. Available in 230 volt, 50 Hz, single phase.
LISTINGS	ETL (U.S. and Canada), NSF International.
WARRANTY	One year parts and labor warranty on cabinet and refrigeration system. Five year warranty on compressor.

MODEL	LENGTH	DEPTH	HEIGHT	STORAGE CAPACITY	SHELVES	SHELF AREA	COMPRESSOR	AMPS	WEIGHT
SKP278	27	29 3/8"	44 1/2"	6.5 cu. ft.	2	8 sq. ft.	1/5 hp	3.9	210 lbs
SKP488	48	29 3/8"	44 1/2"	12.2 cu. ft.	4	14.5 sq. ft.	1/4 hp	4.3	325 lbs
SKP4812	48	29 3/8"	44 1/2"	12.2cu. ft.	4	14.5 sq. ft.	1/4 hp	4.3	300 lbs
SKP6016	60	29 3/8"	44 1/2"	15.3 cu. ft.	4	18.9 sq. ft.	1/3 hp	7.0	330 lbs
SKP7218	72	29 3/8"	44 1/2"	18.8 cu. ft.	6	23.6 sq. ft.	1/3 hp	10.2	350 lbs



Specifications subject to change without notice.

Dimensions in inches

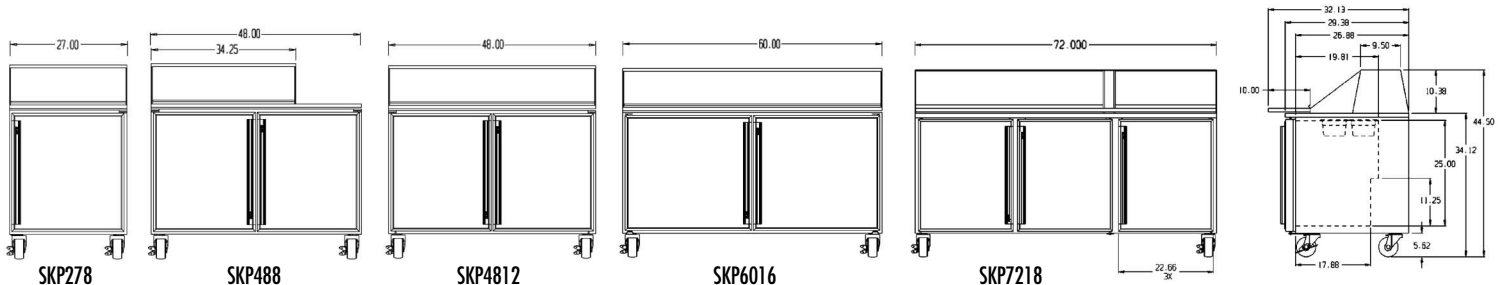

1600 Xenium Lane North
Minneapolis, MN 55441-3787
Phone (763) 923-2441
Fax (763) 553-1209
www.silverking.com

#FNSKFBPO3
© Silver King 2002
Printed in U.S.A.