

# WVAE-30F VENTLESS FRYER

WVAE-30F VENTLESS FRYER



WVAE-30F

## Features

- **Ventless Hood System** exceeds EPA Standard 202 for the release of particulate matter.
- **Air Filter Interlock System** will not allow heating element to be energized if the baffle or HEPA filter is not in place.
- **Airflow Sensing System** is designed to monitor airflow through the filtration system to optimize grease removal efficiency.
- **Ansul R-102 Fire Suppression** is built into the Ventless Hood using a unique anti-fire design.
- **Automatic Oil Temperature Control** ensures precise temperatures to produce consistent high quality products while minimizing energy consumption.
- **Flat bar element**, located below the basket, is heavy-duty stainless steel with a low watt density for longer oil life.
- **Repeat cycle timer** activates using one push button operation.
- **Oil filter system** is easy to operate and combined with Flavor Saver Filter Powder will **substantially increase oil life**.
- **Automatic basket lift cradle** raises basket above oil at end of timed cook cycle, maximizing handling safety.
- **Cover** opens and closes automatically with the basket.
- **Round frypot** is constructed of spun stainless steel with a 30 lb. oil capacity.
- **Nickel-plated, perforated steel basket** has a detachable handle for lowering and removing basket from the frypot.
- **The WVAE-30F fryer** is Underwriters Laboratories, Inc. LISTED and meets NSF International standards.
- **A one-year warranty** against defects covers parts and labor.

## Specifications

Overall Dimensions:	Inches	MM
Width	15 13/16	402
Depth	43 11/16	1110
Height (incl. 4" legs)	76 1/2	1943
Oil Capacity:	Lbs.	KG
WVAE-30F	30	14
Typical Production:	Lbs.	KG
Chicken <i>frozen</i>	12*	5
Chicken <i>fresh</i>	14*	6
*With standard basket only		
Weights:	Lbs.	KG
Installed	402	182
Shipping	502	228

## Accessories / Options

- HEPA Filter, fits all ventless fryers, 22402
- Charcoal Filter, fits all ventless fryers, 22403
- Flavor Saver Oil Filter Powder, 45 packs, 22410
- Oil Filter Paper, 21711
- Rear Leg Kit, for remote pull, 22692

### Export

The following model is available for export and meets the standards for CE:

- WVAE-30FEU, 380-415V, 3Ø, 9600 watts





LISTED  
E146882



STD.4




E146882



EXPORT  
MODELS  
ONLY

**DIMENSIONS:**

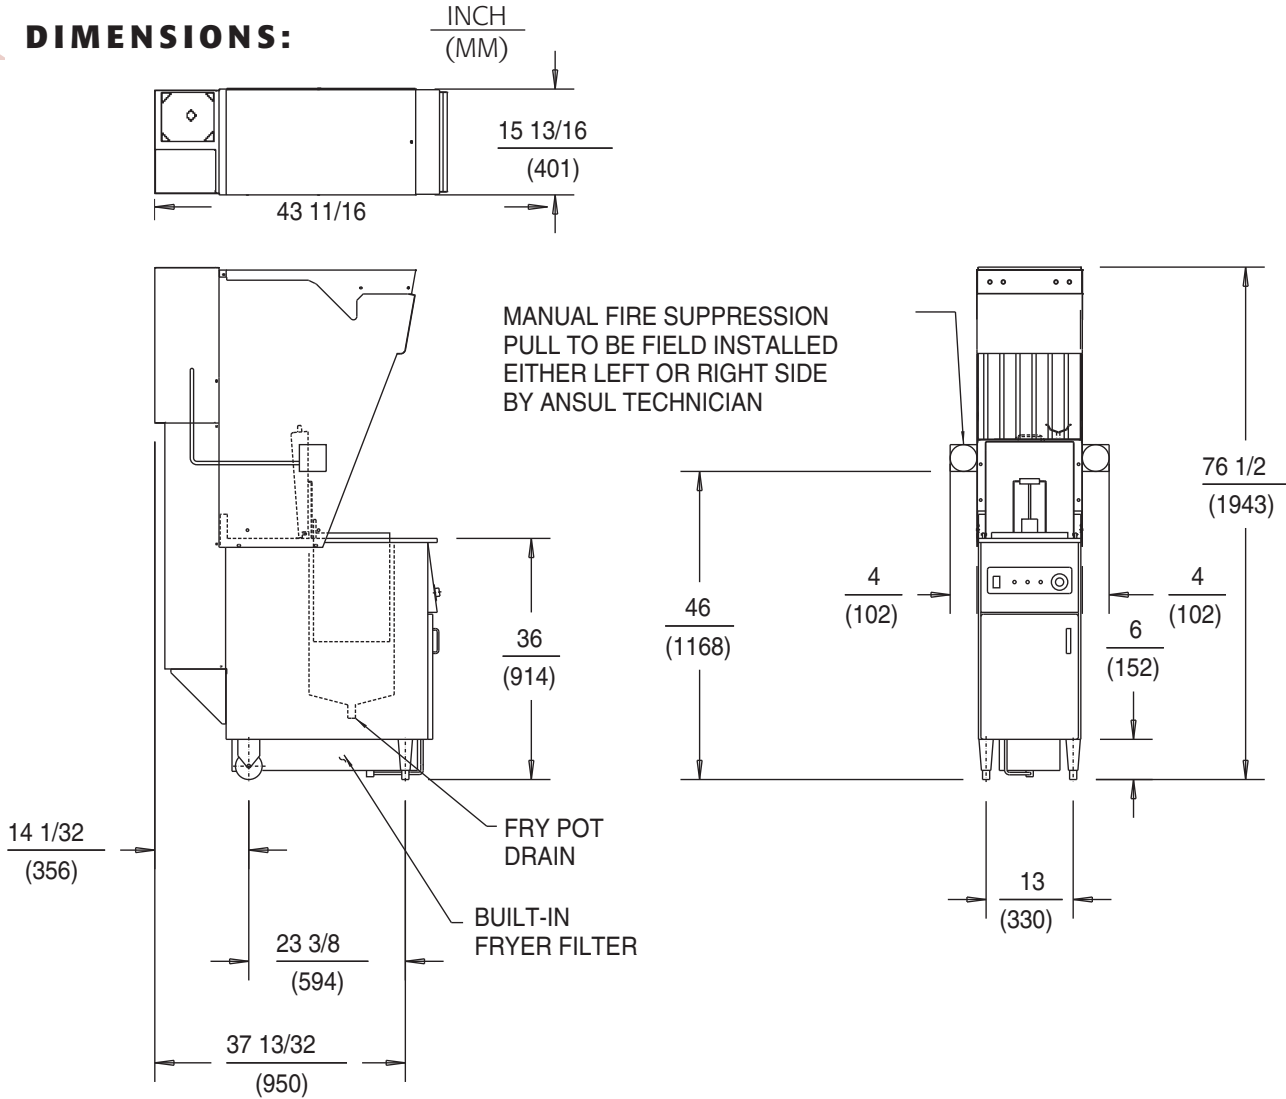

**WVAE-30F ELECTRICAL SPECIFICATIONS:**

MODELS	VOLTS	WATTS	AMPS PER LINE PHASE 3				AMPS SINGLE PHASE	POWER SUPPLY CORD
			L1	L2	L3	N		
WVAE-30F	208	9000	26.5	25.0	26.5	NA	43.3	NONE
WVAE-30F	240	9000	23.0	21.7	23.0	NA	37.5	NONE
WVAE-30FEU	380-415	9600	15.0	13.0	13.0	3.0	NA	NONE

Denotes export (EU) products.

NOTE: Specifications are subject to change without notice.

SPECIAL ENVIRONMENTAL NOTICE: The hood system is designed to reduce odor emissions but will not eliminate odors. Air exchange at the installation site must comply with requirements of the local jurisdictional authority. To ensure dilution of odor build-up, minimum recommendation is 400 cubic feet of fresh air per minute both in and out of the area.

WELLS MANUFACTURING COMPANY  
2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A. • USA PHONE: (775) 689-5700 • FAX: (775) 689-5972  
FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142 • www.wellsbloomfield.com  
© 2001 WELLS MANUFACTURING • PRINTED IN THE U.S.A. • 03/01 • REV(C) • PART NO. 47683

