

# WVAE-55F, WVAE-55FS VENTLESS FRYER

WVAE-55F, WVAE-55FS VENTLESS FRYER



WVAE-55FS

## Features

- **Ventless Hood System** exceeds EPA Standard 202 for the release of particulate matter.
- **Air Filter Interlock System** will not allow heating element to be energized if the baffle or HEPA filter is not in place.
- **Airflow Sensing System** is designed to monitor airflow through the filtration system to optimize grease removal efficiency.
- **The system warning light** will indicate when the HEPA filter needs to be replaced.
- **Ansul R-102 Fire Suppression** is built into the Ventless Hood using a unique anti-fire design.
- **The solid state control** on the **WVAE-55FS** incorporates a seven key programmable time and temperature menu.
- **Repeat cycle timer** activates using one push button operation.
- **Paperless filtration system** reduces labor and cleans oil more efficiently, and combined with Flavor Saver Filter Powder will **substantially increase oil life**.
- **Automatic basket lift cradle** raises basket above oil at end of timed cook cycle, maximizing handling safety.
- **Flat bar elements**, located below the basket, are heavy-duty stainless steel with a low watt density for longer oil life.
- **Frypot** is constructed of stainless steel and robotically welded for durability.
- **The WVAE-55F and WVAE-55FS fryers** are Underwriters Laboratories, Inc. LISTED and meet NSF International standards.
- **A one-year warranty** against defects covers parts and labor.

## Specifications

Overall Dimensions:	Inches	MM
Width	15 13/16	401
Depth	43 11/16	1110
Height (incl. 4" legs)	76 3/8	1940
Oil Capacity:	Lbs.	KG
WVAE-55F/FS	55	25
Typical Production:	Lbs.	KG
Chicken <i>frozen</i>	25*	11
Chicken <i>fresh</i>	33*	15
*With standard basket only		
Weights:	Lbs.	KG
Installed	425	193
Shipping	525	238

## Export

The following models are available for export and meet the standards for CE:

- **WVAE-55FEU**, 380-415VAC, 3Ø, 17400 watts
- **WVAE-55FSEU**, 380-415VAC, 3Ø, 17400 watts

## Accessories / Options

- HEPA Filter**, fits all ventless fryers, 22402
- Charcoal Filter**, fits all ventless fryers, 22403
- Flavor Saver Oil Filter Powder**, 45 packs, 22410
- Rear Leg Kit**, for remote pull, 22692
- Half-Size Baskets Available**






## MODEL WVAE-55F FRYERS

### DIMENSIONS:

INCH  
(MM)

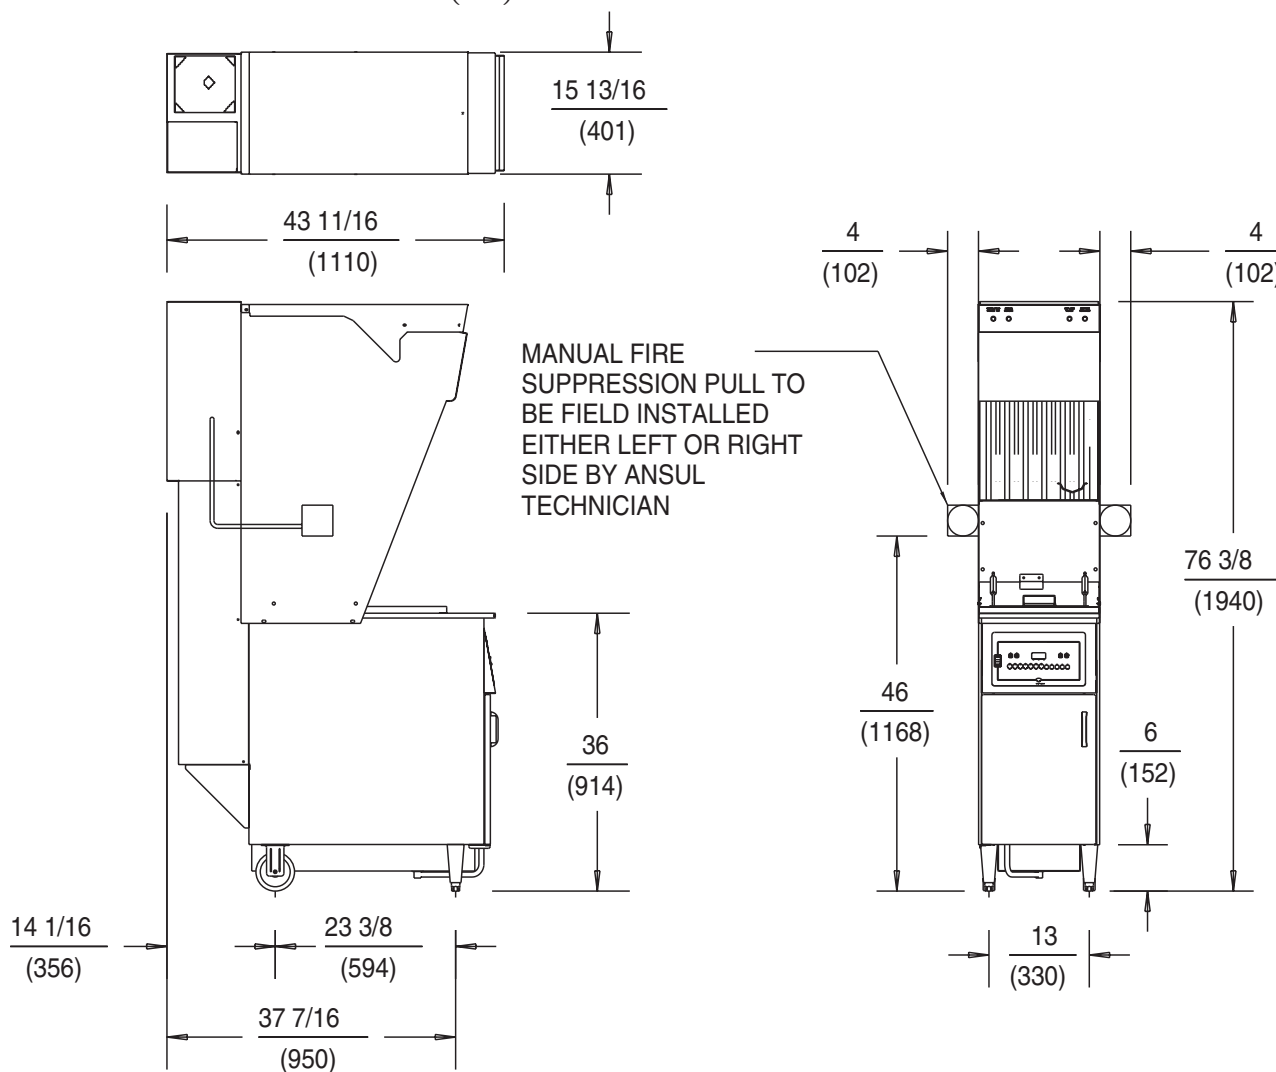

### WVAE-55F ELECTRICAL SPECIFICATIONS:

MODELS	VOLTS	WATTS	AMPS PER LINE PHASE 3				AMPS SINGLE PHASE	POWER SUPPLY CORD
			L1	L2	L3	N		
WVAE-55F	208	17000	47.8	47.2	47.8	NA	NA	NONE
WVAE-55F	240	17000	41.5	41.0	41.5	NA	NA	NONE
WVAE-55FEU	380-415	17400	26.0	24.0	24.0	3.0	NA	NONE

All models with an 'S' suffix have the same electrical specifications as the standard units.

NOTE: Specifications are subject to change without notice. Denotes export (EU) products.

SPECIAL ENVIRONMENTAL NOTICE: The hood system is designed to reduce odor emissions but will not eliminate odors. Air exchange at the installation site must comply with requirements of the local jurisdictional authority. To ensure dilution of odor build-up, minimum recommendation is 400 cubic feet of fresh air per minute both in and out of the area.

#### WELLS MANUFACTURING COMPANY

2 ERIK CIRCLE, PO BOX 280, VERDI, NV 89439 U.S.A. • USA PHONE: (775) 689-5700 • FAX: (775) 689-5972

FOR ORDERS ONLY: (888) 356-5362 • FAX: (800) 356-5142 • www.wellsbloomfield.com

©2001 WELLS MANUFACTURING • PRINTED IN THE U.S.A. • 03/01 • REV(C) • PART NO. 302022

