



## Slide in Electric Rangetops – Install Quick Specs CTE 36” Wide

Model	Cutout Dimensions*		
	A	B*	C
CTE36P	33 7/8"	24 3/4"	36 1/8"

\*Dimension "B" will depend on your countertop design.

### Installation Type

Fig. A - Slides into cabinet/countertop opening

Fig. B - Slides into notched cabinet/countertop

### Standard Features

- 304 Series, 1/8" thick stainless steel framed ceramic glass
- CTE36P is designed for wall, island or peninsula installations
- Rapid response ribbon heating elements
- Multiple cooking zone layout to accommodate a variety of pan sizes and shapes
- Shallow rough-in box depth to allow for extra cabinet storage below rangetop
- Front positioned knobs to maximize cooking surface area
- Stainless steel end caps for Fig. B installation - *included*

### Finishes

- Black textured Ceramic Glass with Stainless Steel frame


### Maximum Power Supply Required

50 Amps @ 208/240 V AC, 3-wire, 60 Hz, single phase


3' flexible conduit (located in the right rear of the cooktop) - *included*

### Cooktop Carton Weight:

CTE36P = 85 lbs.

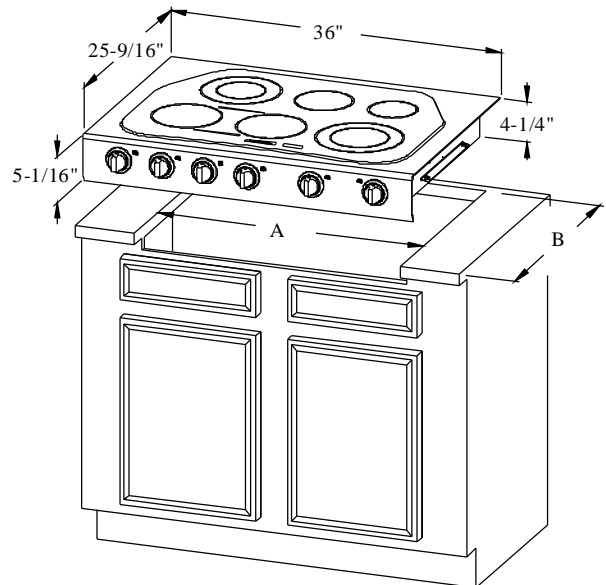

**Fig A - CTE36P Installed without End Caps**

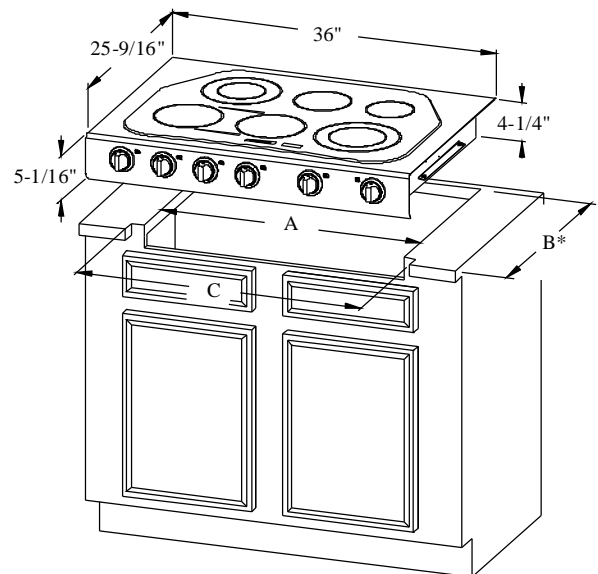

**Fig B - CTE36P Installed with End Caps**

