

Multi Chef™

Cut Your
Cooking Time
By Up To
80%



MULTI-CHEF™ 7500PC Counter Top Model

- **Bakes**
- **Grills**
- **Broils**
- **Toasts**
- **Steams**
- **Roasts**
- **Browns**
- **Sautés**
- **Reheats**
- **Fries** (without oil)

The Ultimate High-Speed All-In-One Cooking System

Multi-Chef's patented *Rotary Air Impingement™* technology prepares a wide variety of foods in a fraction of the time of traditional convection ovens *without the use of microwave*. From toasting a sub to preparing a juicy steak, baking a pizza or steaming vegetables, Multi-Chef does it all without sacrificing food quality. The Multi-Chef's sealed cooking chamber eliminates the need for hoods and vents allowing it to be installed virtually anywhere.

800-348-2976
www.multichef.com



Your source for *innovative* kitchen solutions

Multi-Chef™

The Ultimate High-Speed All-In-One Cooking System

Model 7500 PC





Compare
These Cook
Times!



**Reduce Cook Time
by up to 80%!**

Convection Oven

Multi-Chef Oven

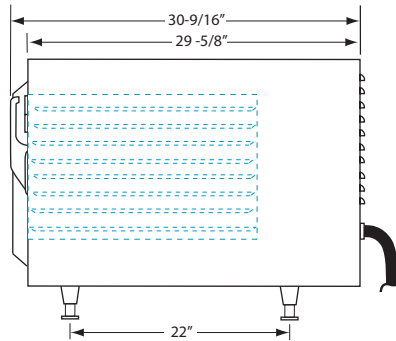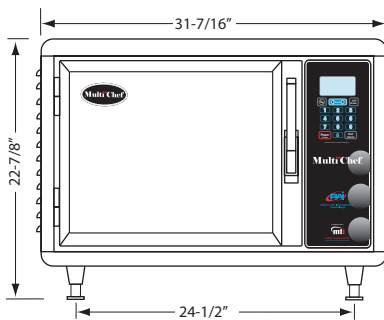

Please Note: Dimension shown do not include 1/4" air louvers on sides and back of oven.

- **No Exhaust Hoods or Vents Required**
- **Toast Subs in 30 Seconds**
- **Cooks 18" Frozen Pizza in 2.5 Minutes**
- **4 Tray Cooking Capacity** (Up to four 18" pizzas)
- **Multi-Functional Cooking**
- **Versatile** (Cooks Fresh or Frozen)
- **Cooks Multiple Products at the Same Time**
- **Microwave Free** (accepts metal cookware)
- **Eight Tray Rack Positions**
- **100 Programmable Menu Presets**
- **Space-Saver Design** (fits on a countertop)
- **Energy Saving Stand-by Mode**
- **Easy to Clean** (removable cooking cavity and door)
- **Proudly Made in the USA**

S P E C I F I C A T I O N S

CAPACITY SPECIFICATIONS

Cabinet Ext. Dim.:	W = 31-7/16" H = 22-7/8" D = 30-9/16"
Useable Int. Dim.:	Width = 18" Height = 10" Depth = 18"
Cooking Tray Capacity:	18" x 18" Tray — Total 324 Square inches
Useable Cooking Capacity:	Up to 4 Trays — Total 1,296 Square Inches (9 sq. ft.)
Approx. Unit Weight (lbs):	205 lbs.

ELECTRICAL SPECIFICATIONS

Voltage, Frequency – Phase:	208-240 VAC, 60 Hz – 1 Phase
Amperage:	35.7–39.7 Amps.
Max. Input:	7500–9600 Watts
Cord Length & Plug Type:	6' Cord w/NEMA 6-50 P plug
Cooking Temperature Range:	100° – 500°F
Minimum Wall Clearance:	1" on all sides, 3" in back



SHIPPING SPECIFICATIONS

Approx. Crated Weight (lbs):	250 lbs.
Approx. Shipping Carton Size:	39" Wide x 38" Deep x 31" High
Approx. Shipping Carton Volume:	21.9 Cu. Ft.

VENTING REQUIREMENTS

Because of its sealed cooking chamber, the Multi-Chef™ has been engineered and approved to operate safely without a hood and venting system. Check county and local ordinances. Local codes will prevail.

This product conforms to the ventilation recommendations set forth by NFPA96 and is UL Certified to meet EPA 202 test method.

WARRANTY

The Multi-Chef™ is backed by a limited one (1) year parts and labor warranty

A C C E S S O R I E S

INCLUDED WITH THE MULTI-CHEF™

Teflon® Coated Internal Cooking Chamber
Basket Cooking Tray (18" x 18")
Commercial Hot Mitt
Spray Bottle

OPTIONAL ACCESSORIES

Extra Cooking Trays
Interior/Exterior Oven Cleaner Spray

version 06.08

800-348-2976

www.multichef.com



Motion Technology, Inc.

10 Forbes Road • Northborough, MA 01532 • T 508-460-9800 • F 508-393-5750

We reserve the right to change specifications appearing on this bulletin without notice and without incurring any obligation for the equipment previously or subsequently sold.