

| PROJECT_ |         |  |
|----------|---------|--|
| OTY      | ITEM NO |  |

Date Modified 6/2/08

# **One Full Door Freezer**



JFD-23F 23 cu.ft., 1 section

Stainless steel interior & exterior standard! Fully-recessed door handles! Slide shelving system! Exterior digital temperature controls!

#### STANDARD FEATURES:

- Fully Recessed Door Handles
- Self-Contained Bottom Mounted Refrigeration System
- 3 Vinyl-Coated Wire Shelves
- 5" Casters Included
- Door Lock

- Reinforced Door Hinges
- CFC-free R-404a Refrigerant
- Evaporative Hot Gas Condensate Pan
- Fully Coved Interior Corners
- Automatic Door Closure with 90º Hold Open Feature

- Slide Shelving Sytem
- 2.5" Thick Foamed-in-place Polyurethane Insulation
- Exterior Digital Temperature Control
- Snap-In Magnetic Door Gaskets
- Assembled in USA

#### MATERIALS:

INTERIOR: Stainless steel interior walls, floor, and ceiling.

Vinyl-coated wire shelves.

EXTERIOR: Stainless steel sides and door







## **DIMENSIONAL DATA:**

| Model No. | L     | D     | Н     | Cu.Ft. | Shelves | H/P | Volt     | Amp. | NEMA  | Ship Wt. |
|-----------|-------|-------|-------|--------|---------|-----|----------|------|-------|----------|
| JFD-23F   | 29.1" | 32.3" | 81.8" | 23     | 3       | 1/2 | 115/60/1 | 8.5  | 5-15P | 320      |



### **Solid Door Freezer**

## JFD-23F

Description: One solid full door freezer, 23 cu. ft

#### **Features & Benefits**

Stainless steel interior and exterior for greater durability, construction and appearance.

Self-contained bottom mounted refrigeration system and high humidity coated **fin coil** evaporator.

• Holds -10° F to 10° F as freezer

Exterior LED temperature display with digital controls. **Temperature setting is easy, fast and accurate.** 

Micro-controller with adjustable temperature variance, automatic defrost intervals, setpoint limits, and parameter locking functions.

2.5" thick, foamed-in-place polyurethane high density insulation.

3 adjustable vinyl-coated steel wire shelves. Built-in tray slides to accomodate shelves (standard) or 18"x26" sheet pans (optional).

5" casters standard. **Easy mobility and installation.** 


Heavy-duty overall construction for high-volume, constant duty operation.


Self-closing door with 90° hold open feature.

Door lock standard.

Door handle gaskets for ease of use.

Hot gas condensate - no floor drain required!



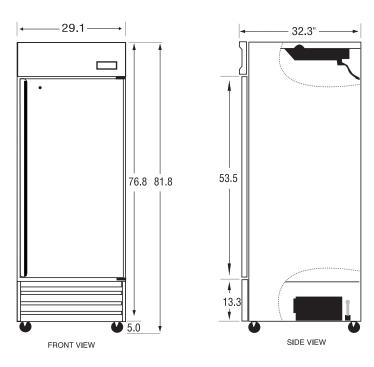



#### General Information

Cubic Ft.: 23Doors: 1Exterior: StainlessInterior: Stainless

**Shelf Size:** 25.0" x 20.75" **Unit Weight:** 290 lbs. **Ship Weight:** 320 lbs.

#### Technical Data

Refrigerant: R-404a Start Amps: 10.6 Run Amps: 8.5 Horsepower: 1/2

Volts: 115 #Compressors: 1 Cord Length: 82 in.