

PROJECT_		
OTY	ITFM NO	

Date Modified 6/2/08

# Two Full Door Freezer



JFD-48F 48 cu.ft., 2 section

Stainless steel interior & exterior standard! Fully-recessed door handles! Slide shelving system! Exterior digital temperature controls!

- Fully Recessed Door Handles
- Self-Contained Bottom Mounted Refrigeration System
- 6 Vinyl-Coated Wire Shelves
- 5" Casters Installed
- Door Lock

- Reinforced Door Hinges
- CFC-free R-404a Refrigerant
- Evaporative Hot Gas Condensate Pan
- Fully Coved Interior Corners
- Automatic Door Closure with 90º Hold Open Feature

- Slide Shelving Sytem
- 2.5" Thick Foamed-in-place Polyurethane Insulation
- Exterior Digital Temperature Control
- Snap-In Magnetic Door Gaskets
- Assembled in USA

#### MATERIALS:

INTERIOR: Stainless steel interior walls, floor, and ceiling.

Vinyl-coated wire shelves.

EXTERIOR: Stainless steel sides and doors.







### **DIMENSIONAL DATA:**

Model No.	L	D	Н	Cu.Ft.	Shelves	H/P	Volt	Amp.	NEMA	Ship Wt.
JFD-48F	53.5"	32.3"	81.8"	48	6	3/4	115/60/1	9.9	5-20P	490

### Solid Door Freezer

## JFD-48F

Description: Two solid full door freezer, 48 cu. ft

#### **Features & Benefits**

Stainless steel interior and exterior for greater durability, construction and appearance.

Self-contained bottom mounted refrigeration system and high humidity coated **fin coil** evaporator.

• Holds -10° F to 10° F as freezer

Exterior LED temperature display with digital controls. **Temperature setting is easy, fast and accurate.** 

Micro-controller with adjustable temperature variance, automatic defrost intervals, setpoint limits, and parameter locking functions.

2.5" thick, foamed-in-place polyurethane high density insulation.

6 adjustable vinyl-coated steel wire shelves. Built-in tray slides to accomodate shelves (standard) or 18"x26" sheet pans (optional).

5" casters standard. **Easy mobility and installation.** 


Heavy-duty overall construction for high-volume, constant duty operation.


Self-closing door with 90° hold open feature.

Door locks standard.

Door handle gaskets for ease of use.

Hot gas condensate - no floor drain required!



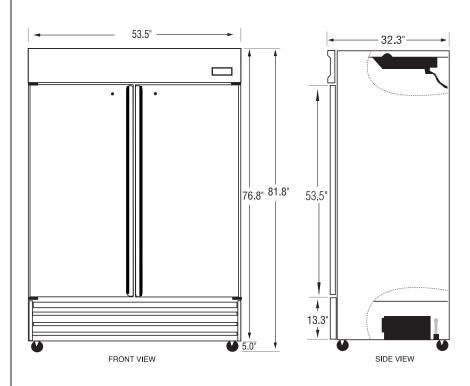



### General Information

Cubic Ft.: 48Doors: 2Exterior: StainlessInterior: Stainless

Shelf Size: 25.0" x 20.75" Unit Weight: 460 lbs. Ship Weight: 490 lbs.

Technical Data

Refrigerant: R-404a Start Amps: 13.8 Run Amps: 9.9 Horsepower: 3/4

Volts: 115 #Compressors: 1 Cord Length: 82 in.