

Project

Item #

Quantity



GLOBE FOOD EQUIPMENT COMPANY

Automatic Frozen Meat Slicers

3850PF



# 3850PF Automatic Frozen Meat Slicer

## Model

3850PF - Two Speed Automatic Frozen Meat Slicer



Made in the U.S.A.



### Standard Features

- Exclusive stainless steel construction
- EZ-Glide™ adjustable slicing table
- 13" hardened steel alloy serrated knife
- Powerful 1/2 HP, 7 amp motor
- High-performance gear drive system
- Independant chute motor
- Built-in antimicrobial protection
- Precision gear slice thickness adjustment
- Open space base design
- Knife cover interlock
- Permanently attached knife ring guard
- Full gravity feed, 45° angle
- 3 lb. stainless steel endweight
- Unique dual arm lift lever
- Touch pad controls
- Power indicator light
- No voltage release

*Features a 13" serrated knife and a high-performance gear drive system specifically designed for this tough application.*

### Options and Accessories

- Front mounted endweight assembly
- Low food fence (12"L x 1-3/8"H)
- High food fence (12"L x 3"H)
- 3" extension legs
- 10 lb. attachable portion control scale
- Clear plastic slicer cover

### Standard Warranty

- Two-years parts and one-year labor plus 15 years on the knife drive gears

Approved By: \_\_\_\_\_

Date: \_\_\_\_\_



**GLOBE FOOD EQUIPMENT COMPANY**

[www.globeslicers.com](http://www.globeslicers.com)

2153 Dryden Rd.  
Dayton, OH 45439  
Phone: 937-299-5493  
Phone: 800-347-5423  
Fax: 937-299-4147



# Automatic Frozen Meat Slicers

# 3850PF

## Specifications

**Finish:** Exclusive all stainless steel base with radiused corners improves sanitation and durability. Other stainless steel parts include the food chute, slicing table, endweight and knife cover.

**Knife Motor:** Powerful 1/2 HP, 7amp, 115/60/1.

**Chute Motor:** Two speed DC fractional horsepower 1 amp. Both motors have permanently lubricated sealed ball bearings.

**Knife Drive:** Cross axis helical gear drive design, which is continuously lubricated in an oil bath, ensures quiet operation and superior cutting performance when slicing frozen meat.

**Slice Thickness:** Precision dual gear design eliminates table movement during slicing. Consistently produces tissue thin slices with a maximum slice thickness of 1 1/4" thick.

**Antimicrobial Protection:** Knobs and handles have antimicrobial protection built-in, which inhibits the growth of bacteria and provides superior sanitation.

**Full Gravity Feed:** Full 45° angle feed requires less mechanical pressure. Equipped with a 3 lb. stainless steel endweight to minimize waste and hold product. Food chute handle is ergonomically designed and the endweight swings away for storage behind the chute.

**Table:** EZ-Glide™ adjustable slicing table is designed to reduce surface friction, facilitating a smooth and easy slicing stroke.

**Dual Arm Lift Lever:** A handle activates two large wheels, lifting the front of the unit to facilitate safe and easy cleaning underneath the slicer.

**Knife Cover Interlock:** Slicer will not operate with knife cover removed.

**Knife Ring Guard:** Permanently mounted knife ring guard covers the non-slicing portion of the knife protecting the operator from the knife's edge.

**Serrated Knife:** 13" diameter special hardened steel alloy serrated knife with stain resistant finish and sanitary hub easily slices through frozen meat. Knife's edge has a Rockwell hardness of 60-62.

**No Voltage Release:** Prevents inadvertent reactivation of the slicer in the event of a power or interlock interruption.

**Cutting Capacity:** Width 11.6" (29.5 cm), Height 9" (22.9 cm), Diameter 7.5" (19 cm)

**Power Indicator Light:** A readily visible red light illuminates when the knife is rotating.

**Automatic Chute:** Chute travels 40 or 60 strokes per minute utilizing a separate DC motor with a heavy duty permanently lubricated chain and sprocket drive system. Chute can be quickly engaged or disengaged for manual operation with the auto engage lever.

**Touch Pad Controls:** Start/stop touch pad controls activate the knife motor.


**Chute Speed:** Controlled by faster/slower touch pad controls.

**Cord & Plug:** Attached 7 foot flexible 3 wire cord with molded plug fits a grounded receptacle.

**Dimensions:**  
Foot Print = 14" x 21.6"  
(35.6 cm x 54.9 cm)  
Overall Length = 26.2" (66.5 cm)  
Overall Width = 22" (55.9 cm)  
Overall Height = 25.2" (64 cm)  
Freight Class: 77.5  
Net Weight: 148 lbs. (67.1 kg)  
Shipping Weight: 172 lbs. (78 kg)  
Shipping Dimensions:  
28"W x 25"D x 34"H  
(71.1 cm x 63.5 cm x 86.4 cm)

**Factory Installed Options:**  
**FMEW** Front mounted endweight

**Accessories:**  
**1326** High fence (12" x 3")  
**1047** Low fence (12" x 1 3/8")  
**873-SET** 3" extension legs  
**PS13** 10 lb. attachable portion control scale  
**SC-LARGE** Clear plastic slicer cover

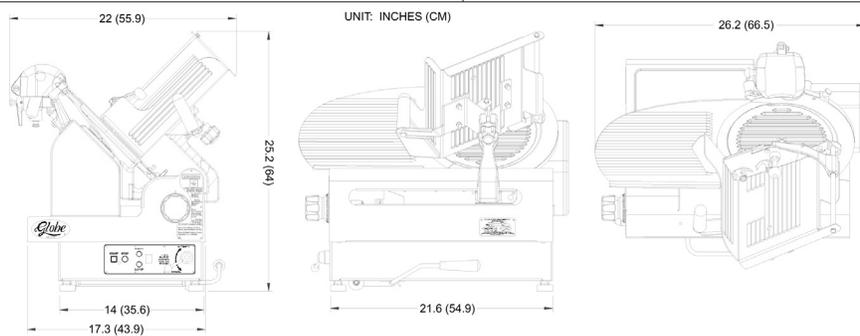

## GLOBE FOOD EQUIPMENT COMPANY

[www.globeslicers.com](http://www.globeslicers.com)

2153 Dryden Rd.  
Dayton, OH 45439  
Phone: 937-299-5493  
Phone: 800-347-5423  
Fax: 937-299-4147

Printed in U.S.A. 04-2010

Specifications are subject to change without notice.