



SECTION 'A'-'A'

- NOTES:
1. WALL THICKNESS TO BE .125 UNLESS OTHERWISE NOTED.
  2. ALLOW MINIMUM DRAFT 1 DEGREE MAXIMUM.
  3. DIMENSIONS ARE TAKEN AT BOTTOM OF DRAFT UNLESS OTHERWISE NOTED.
  4. LOCATION OF PARTING LINES, GATE, AND KNOCKOUT PINS MUST BE APPROVED BY ENGINEERING DEPARTMENT BEFORE TOOLS ARE STARTED.
  5. UNLESS OTHERWISE SPECIFIED, ALLOW 0 TO 1/32 RADIUS ON ALL CORNERS & FILLETS.
  6. MATERIAL TO BE G E CYCOLAC T2679N OR BAYER LUCSTRAN ABS 348 (A) (B) WHITE ABS, NSF APPROVED, MUST NOT BECOME BRITTLE OR BREAK AT -20 DEGREES F.
  7. PARTS TO BE FREE OF FLASH.

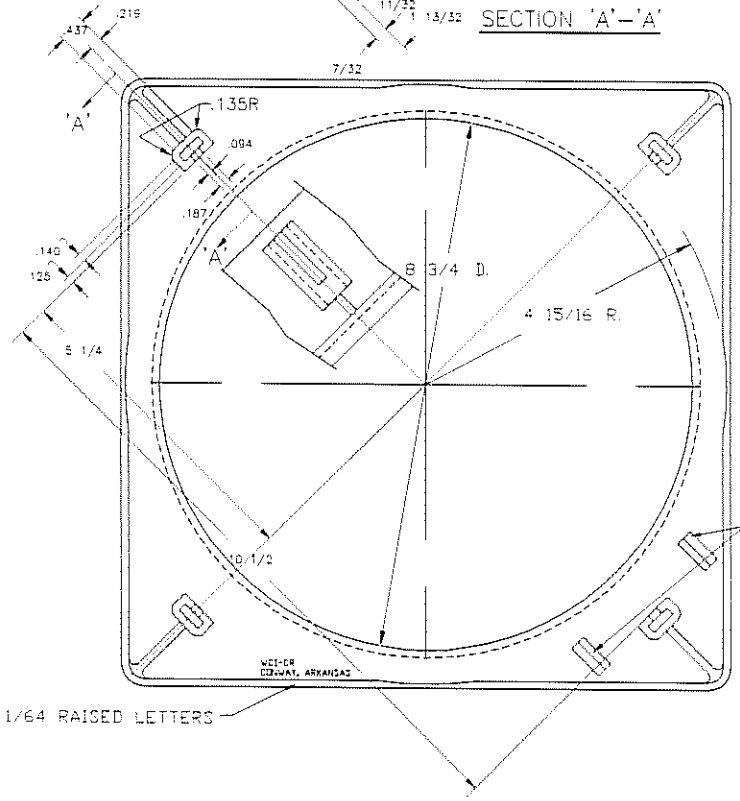


GROUP# 01 ONLY

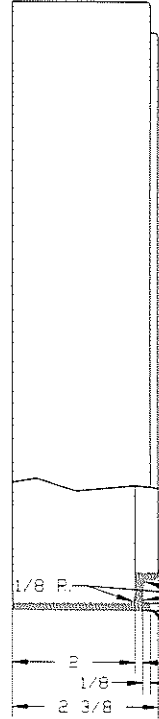


SECTION 'B'-'B'

'FLAVOR STRIP DETAIL'  
GROUP# 01 ONLY



SECTION 'C'-'C'

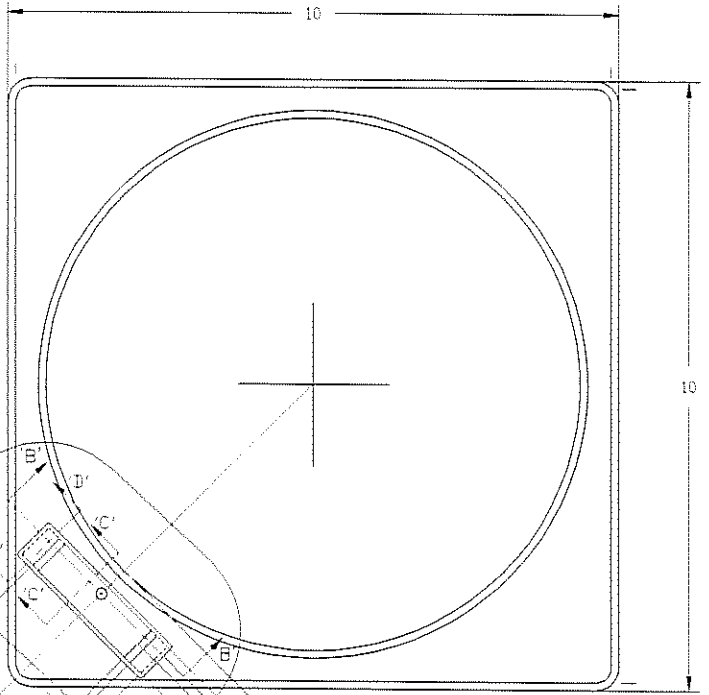

SECTION 'D'-'D'

TR 348 116 218	REV 5-7 97-MSS
A 100 ALTERNATE MATERIAL	REV 3-19 98-30
10 0000 001	REV 3-15 99-116

* GROUP#	DESCRIPTION
02	PART WITHOUT FLAVOR STRIP DETAIL
01	PART WITH FLAVOR STRIP DETAIL

ORIGINATOR: **PRESTON**

DATE: 12/26/01

REV: 01

BY: BZ

10-D-0052-\*