



Bottom Mount Glass-Door Vertical Merchandisers

Low-Temperature Glass-Door

Global's low-temperature reach-in merchandisers are designed to enhance your product sales and display by offering the largest glass viewing area in the industry.

Products are illuminated by state-of-the-art LED lighting and the adjustable cantilever shelves allow products to be customized for display.

Bottom-mount merchandisers are available in three models: ULG30 one-door, ULG50 two-door, and ULG80 three-door. Units may be placed side-by-side to create a continuous merchandising look.



FEATURES:

- Microprocessor Digital Temperature and Programmable Defrost Controller with LED digital display
- LED Lighting
- Triple-pane glass doors with heated perimeter and mullions
- Self-contained bottom-mount compressor
- Auto Door Switch Technology

- Refrigerant R-404a
- Temperature range 0°F to -20°F

OPTIONAL ACCESSORIES:

- Casters
- Additional cantilever shelves

formerly
Kelvinator 

Project:

Quantity:

Item#:

Model Specified:

Approval: _____

Bottom Mount Vertical Merchandisers

TECHNICAL DATA

MODEL	ULG 30 BS	ULG 50 BC	ULG 80 BC
Temp Range	0°F to -20°F	0°F to -20°F	0°F to -20°F
Exterior Dimensions			
Length	31"	52"	78"
Depth	36.88"	36.88"	36.88"
Height	79.75"	79.75"	79.75"
Interior Dimensions			
Length	26 1/4"	47 1/4"	73 1/4"
Depth	29 5/8"	29 5/8"	29 5/8"
Height	60 5/8"	60 5/8"	60 5/8"
Capacity	27.3 cu. ft.	49.1 cu. ft.	76.2 cu. ft.
Shipping Weight	516 lbs.	780 lbs.	1,038 lbs.
Electrical	115V	208-230/115V	208-230/115V
Fuse Size	20	20-30	20-30
Rated Amps	13.0	12.5	16.0

SPECIFICATIONS

Item: ULG _____


Furnish () quantity. BOTTOM-mount Low-temperature Merchandiser, Kelvinator model ULG _____.

The unit shall consist of white powder-coat finished galvanized steel interior and exterior, foamed in place. The Unit will be supplied with four cantilever shelves and a bottom rack per door opening.

Cabinet as specified to use R-404a refrigerant. Refrigeration control shall be electronic control with a temperature range of 0°F to -20°F. Cabinet to have independent on/off switch for compressor and lights.

Electrical Connections


ULG30



ULG50 & ULG80



NEMA L14-20P

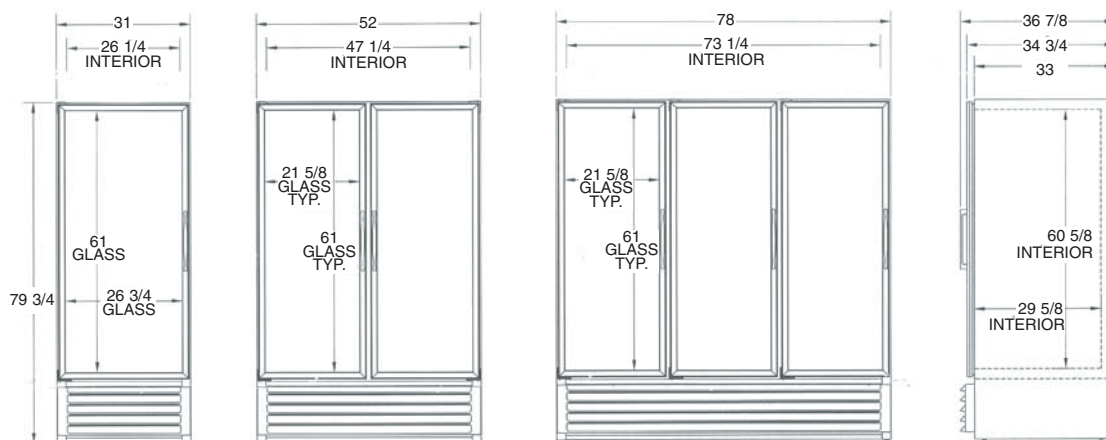

Global Refrigeration, Inc., reserves the right to change specifications, terms, and prices without notice.