



NOR-LAKE, INCORPORATED
727 Second Street
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-6149 FAX
www.norlake.com

ADVANTEDGE™ REACH-IN FREEZERS



(Excluding NLF23-S)

PROJECT:

.....

ITEM NUMBER:

.....

MODEL NUMBER:

.....

SPECIFICATIONS FOR: NLF23-S, NLF49-S, NLF72-S

- **Exterior finish:** Exterior front, sides and doors are stainless steel. Exterior top, bottom and back are galvanized steel.
- **Interior finish:** Interior liner and interior door panel are stainless steel.
- **Insulation:** Complete cabinet and door(s) are foamed-in-place with polyurethane foam insulation.
- **Hardware:** Heavy duty, pivot hinges; key locks; curved handle with recessed pocket; self adjusting magnetic gaskets; 4" dia. casters (4 casters on one and two door models and 6 casters on three door model). 4 vinyl coated shelves per door section.
- **Electrical:** All models are standard with complete perimeter, anti-condensate door frame heater wires. An interior incandescent light is activated by a switch for each door.
- **Instrumentation:** Microprocessor with digital display allows temperature adjustment at control panel.
- **Refrigeration:** Complete bottom mounted refrigeration system with a copper tube, ceiling mount aluminum fin evaporator. The condensate is collected and automatically evaporated from an energy efficient air over wick style vaporizer. Refrigerant flow is controlled by a capillary tube. R-404a refrigerant. Operating temperature range: -5°F to 0°F.
- **Approvals:** UL, C-UL, ETL Sanitation, and ENERGY STAR® qualified (except NLF23-S).

STANDARD FEATURES

- Air-cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Casters
- Capillary tube system
- Curved handle with recessed pocket
- Door open alarm
- Door opening heaters
- Interior light
- Key locks
- Magnetic gasket
- Microprocessor with digital display
- Operating temperature range: -5°F to 0°F
- Polyurethane insulation
- R-404a refrigerant
- Stainless steel interior and exterior
- Vinyl coated shelves
- UL, C-UL, ETL Sanitation & ENERGY STAR® listed.
- Warranties: 3 year parts and labor, 5 year compressor

OPTIONAL FEATURES*


- Extra shelves
- Field reversible hinge kit for single door models (part # 146524)
- Pan slide rack (part # 146515)

* Most options are available two weeks from receipt of order. Please contact us for specific questions.


** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.

**ETL-Sanitation is Intertek Laboratories Safety Certification Mark which indicates that ETL has tested the equipment to applicable NSF Standards.


1, 2 & 3 DOOR FREEZERS



NLF23-S
FRONT




NLF23-S
TOP

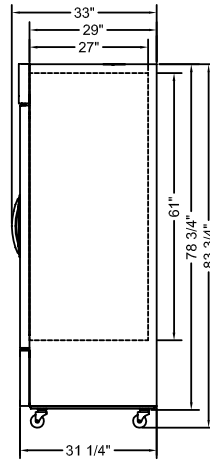


SIDE VIEW
ALL MODELS

SPECIFICATIONS


Models	NLF23-S	NLF49-S	NLF72-S
Crated Weight (lbs) (kg)	308 (139)	483 (217)	653 (294)
Crated Height (in) (cm)	84-1/4 (211)	84-1/4 (211)	84-1/4 (211)
Crated Width (in) (cm)	29-1/8 (73)	56-3/4 (142)	78-3/8 (196)
Crated Depth (in) (cm)	33-1/2 (84)	33-1/2 (84)	33-1/2 (84)
Interior Height (in) (cm)	61 (153)	61 (153)	61 (153)
Interior Width (in) (cm)	23-3/4 (59)	51-1/2 (129)	74-1/4 (186)
Interior Depth (in) (cm)	27 (68)	27 (68)	27 (68)
Overall Height (in) (cm) *	83-3/4 (209)	83-3/4 (209)	83-3/4 (209)
Overall Width (in) (cm)	27-1/2 (69)	55-1/4 (138)	78 (195)
Overall Depth (in) (cm)	33 (83)	33 (83)	33 (83)
Gross Cubage (CuFt) (L)	23 (651)	49 (1387)	72 (2002)
Number of Shelves	4	8	12
Shelf Area (SqFt) (Sqm)	18 (1.67)	39 (3.6)	56.5 (5.25)
Number of Casters	4	4	6
Condensing Unit Size	3/5 HP	4/5 HP	1 HP
Refrigerant	R-404a	R-404a	R-404a
Electrical Characteristics	115/60/1	115/60/1	115/60/ 1
Cord & Plug Furnished	Yes	Yes	Yes
NEMA Plug Configuration	5-15P	5-15P	5-20P
Total Amp Draw	8.5	10.5	12.0

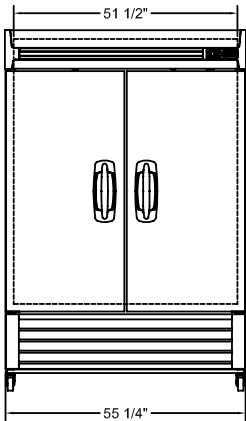


NLF49-S
FRONT



NLF49-S
TOP

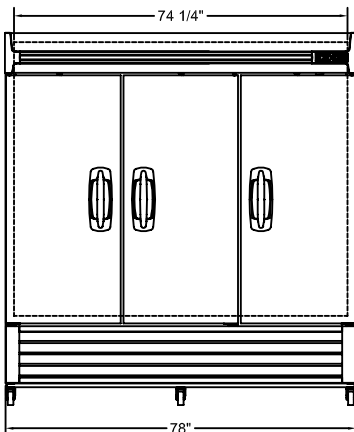

NLF72-S
FRONT

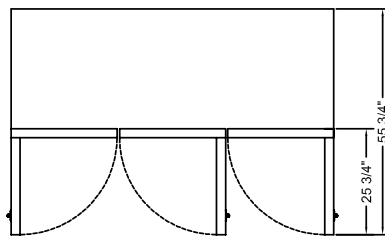

NLF72-S
TOP

Specifications subject to change without notice.

* The overall heights shown in the table and drawings are with casters.



Revision Date: 4/18
Part Number: 138687