

M O B I L E F R E E Z E R

LOW PROFILE

HIGH MOBILITY



Model SKMF34

- Efficient and durable Cold Wall refrigeration system
- Exterior digital temperature indicator
- Stainless steel construction inside and out



SILVER KING[®]
WE'VE GOT REFRIGERATION DOWN COLD™

MOBILE FREEZER SPECIFICATIONS


MODEL SKMF34	EXTERIOR	Stainless steel front, back and sides. Bumpers standard to protect cabinet.
	INTERIOR	Stainless steel with covered corners and finished edges for easy cleaning. Drain with plug standard.
	INSULATION	Environmentally friendly foamed-in-place polyurethane insulation for maximum strength and durability.
	COVER	Self-closing, stainless steel cover and top section are removable for loading and cleaning.
	CASTERS	Supplied with 4 heavy-duty casters, (two with locks), for easy mobility.
	REFRIGERATION	CFC-free, R-404a refrigerant, hermetically sealed, high efficiency, self contained refrigeration system features cold wall design with anti-condensate heater to prevent frost build-up on door track. Adjustable temperature control and digital temperature indicator standard. Manual defrost. Forced air condenser.
	ELECTRICAL	Standard as 115 volt, 60Hz, single phase operation. 8 foot, 3-wire power cord with NEMA 5-15P plug. Available in 230 volt, 50/60Hz, single phase.
	LISTINGS	ETL (U.S. and Canada), NSF International
	WARRANTY	One year materials and workmanship warranty on cabinet. Five year warranty on compressor.

MODEL	OUTSIDE DIMENSIONS			STORAGE CAPACITY	AMPS	COMPRESSOR	SHIPPING WEIGHT
	HEIGHT	WIDTH	DEPTH				
SKMF34	33"	36"	25"	3.7 cu. ft.	6.6	1/3 hp	185 lbs



Specifications subject to change without notice.

Dimensions in inches and centimeters

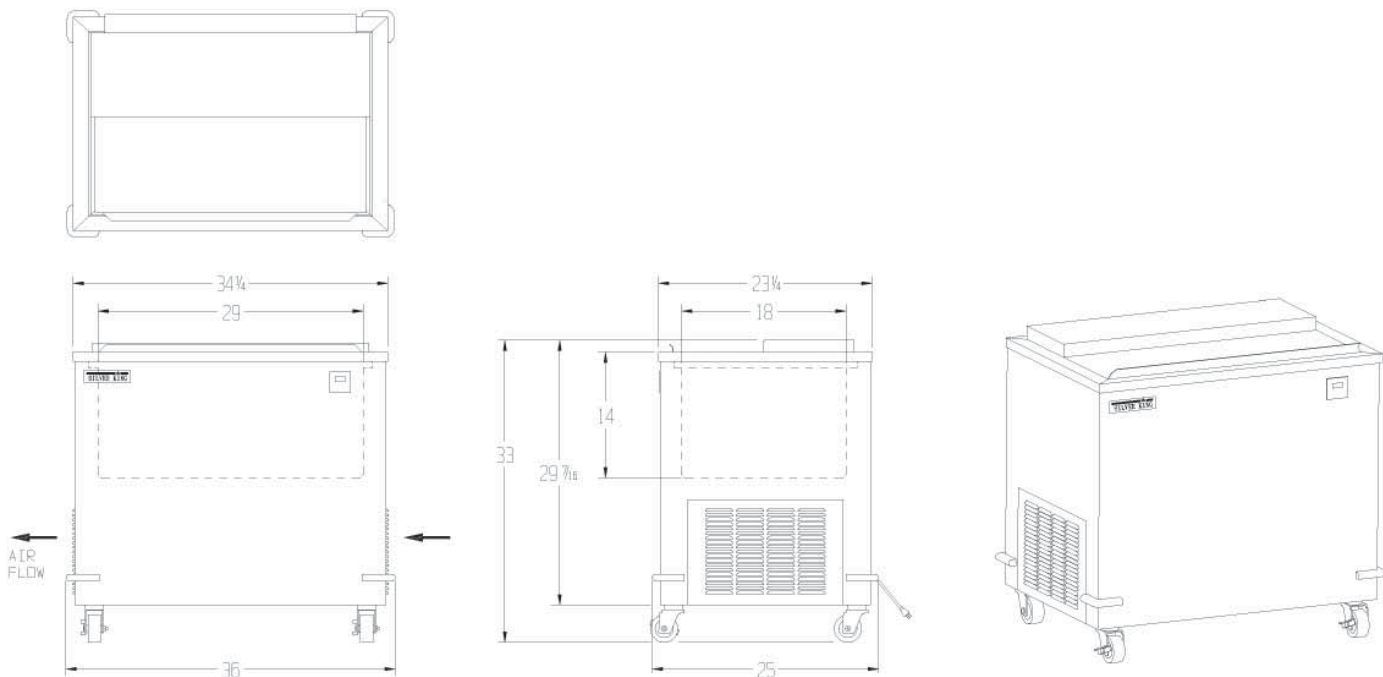

1600 Xenium Lane North
 Minneapolis, MN 55441-3787
 Phone (763) 923-2441
 Fax (763) 553-1209
www.silverking.com

#FNSKMF3407
 © Silver King 2007
 Printed in U.S.A.