



## AdvantEDGE Sandwich Food Preparation Refrigerators

AdvantEDGE SANDWICH FOOD PREPARATION REFRIGERATORS



PROJECT:  
 .....  
 ITEM NUMBER:  
 .....  
 MODEL NUMBER:  
 .....

NLSP48-12

### SPECIFICATIONS FOR: NLSP27-8, NLSP48-12, NLSP60-16, NLSP72-18

- **Finish:** Stainless steel interior and exterior.
- **Insulation:** The complete cabinet and doors are foamed-in-place with polyurethane insulation. Insulated pan cover.
- **Hardware:** Recessed pocket pull handle with one epoxy coated shelf per door, 6" diameter casters standard.
- **Electrical:** 115 volt, 60 Hz, 1 phase with cord and plug.
- **Refrigeration:** Self contained forced air refrigeration system. The condensate is collected and automatically evaporated from an energy efficient air over wick style vaporizer. Refrigerant flow is controlled by a capillary tube. R-134a refrigerant. Temperature range: 32°F to 40°F.
- **Accessories:** 1/6 size pans included and 9-1/2" polyethylene cutting board.
- **Approvals:** UL, C-UL and ETL Sanitation.

#### STANDARD FEATURES

#### OPTIONAL FEATURES\*


- 1/6 size pans included  
 Note: NLSP27-8 has (6) 1/6 size pans and (2) 1/9 size pans included.
- Air cooled condensing unit
- Automatic condensate vaporizer
- Automatic defrost
- Capillary tube system
- Casters standard
- Cutting board
- Magnetic gaskets
- Self closing doors
- Stainless steel interior and exterior
- UL, C-UL and ETL sanitation
- Warranties: 1 Year Parts & Labor, 5 Year Compressor

- Additional shelves




Nor-Lake, Inc.  
 Registered to ISO 9001:2008  
 File No. 10001816

\*Most options are available one week from receipt of order. Please contact us for specific questions.  
 \*\*C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.




FRONT


NLSP27-8



TOP




SIDE




FRONT

NLSP48-12




TOP




FRONT

NLSP60-16




TOP



FRONT

NLSP72-18

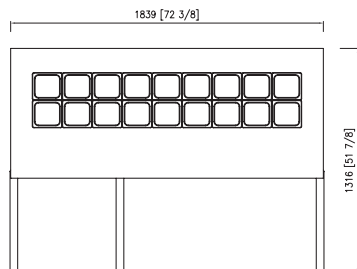

TOP

**SPECIFICATIONS**

Model	NLSP27-8	NLSP48-12	NLSP60-16	NLSP72-18
Crated Height	42-7/8"	42-7/8"	42-7/8"	42-7/8"
Crated Width	30-1/8"	51-1/8"	63"	74-3/8"
Crated Depth	33-1/2"	33-1/2"	33-1/2"	33-1/2"
Crated Weight (lbs.)	212	304	344	384
Interior Height	26-1/8"	26-1/8"	26-1/8"	26-1/8"
Interior Width	23-3/4"	44-5/8"	56-3/4"	68-5/8"
Interior Depth	20-1/4"	20-1/4"	20-1/4"	20-1/4"
Overall Height	42-1/2"	42-1/2"	42-1/2"	42-1/2"
Overall Width	27-1/2"	48-1/4"	60-3/8"	72-3/8"
Overall Depth	30"	30"	30"	30"
Gross Cubage (ft. <sup>3</sup> )	7	13	16	20
Number of Shelves	1	2	2	3
Number of Casters	4	4	4	4
Condensing Unit Size	1/5 HP	3/8 HP	3/8 HP	3/8 HP
Refrigerant	R-134a	R-134a	R-134a	R-134a
Electrical Characteristics	115/60/1	115/60/1	115/60/1	115/60/1
Cord and Plug Furnished	Yes	Yes	Yes	Yes
Nema Plug Configuration	5-15P	5-15P	5-15P	5-15P
Total Amp Draw	3.2	7.9	7.9	9.9

Specifications subject to change without notice.



Revision: 5/10  
 ©2010 Nor-Lake, Inc.  
 Printed in the USA  
 Part Number: 146621

